

**NASA Contractor Report** 172254

NASA-CR-172254  
19840004710

# ICASE

MULTIDIMENSIONAL EXPLICIT DIFFERENCE SCHEMES  
FOR HYPERBOLIC CONSERVATION LAWS

Bram van Leer

Contract No. NAS1-15810  
November 1983


INSTITUTE FOR COMPUTER APPLICATIONS IN SCIENCE AND ENGINEERING  
NASA Langley Research Center, Hampton, Virginia 23665

Operated by the Universities Space Research Association



National Aeronautics and  
Space Administration

**Langley Research Center**  
Hampton, Virginia 23665

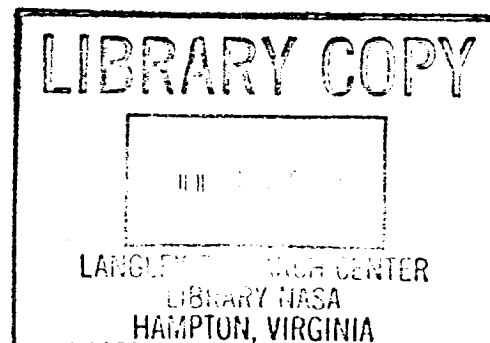






**MULTIDIMENSIONAL EXPLICIT DIFFERENCE SCHEMES  
FOR HYPERBOLIC CONSERVATION LAWS**

Bram van Leer  
Delft University of Technology  
Delft, The Netherlands

ABSTRACT

First- and second-order explicit difference schemes are derived for a three-dimensional hyperbolic system of conservation laws, without recourse to dimensional factorization. All schemes are upwind biased and optimally stable.

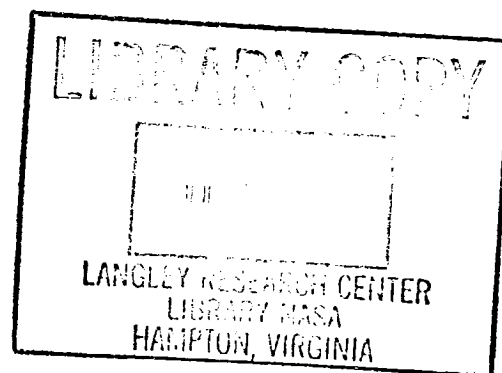

---

Research supported in part by the National Aeronautics and Space Administration under NASA Contract No. NAS1-15810 while the author was in residence at the Institute for Computer Applications in Science and Engineering, NASA Langley Research Center, Hampton, VA 23665.



## 1. INTRODUCTION

For the solution of initial-value problems governed by hyperbolic conservation equations some fine numerical techniques are available. Most methods are based on a one-dimensional scheme

$$u^{n+1} = L_x(\Delta t) u^n, \quad (1)$$

integrating the system of conservation laws

$$u_t + [f(u)]_x = 0 \quad (2)$$

from time  $t^n$  to  $t^{n+1} = t^n + \Delta t$ . A multi-dimensional system like

$$u_t + [f(u)]_x + [g(u)]_y + [h(u)]_z = 0 \quad (3)$$

may always be approximated by a sequence of one-dimensional steps; most commonly used is

$$u^{n+1} = L_z(\Delta t) L_y(\Delta t) L_x(\Delta t) u^n, \quad (4.1)$$

$$u^{n+2} = L_x(\Delta t) L_y(\Delta t) L_z(\Delta t) u^{n+1}, \quad (4.2)$$

with second-order accuracy in time at every other time-level [1].

The convenience of such a factorization is twofold. Firstly, in developing multi-dimensional methods one may concentrate on one-dimensional operators; secondly, multi-dimensional codes reduce to a sequence of one-dimensional sweeps.

A display of the power of the above approach is found in the review paper by Woodward and Colella [2] on the numerical simulation of two-dimensional, strongly compressible flow.

Considering the success of dimensional factorization we may ask ourselves if there is any point in designing genuinely multi-dimensional methods, i.e. methods that can not be implemented as a sequence of one-dimensional operators. The answer still is "yes", but may very well tend to "no" if computers will continue to grow, in speed and capacity, at the current pace. The same, however, may have been said, more than 20 years ago, on the matter of developing second-order methods. In both cases the increase in complexity of the methods is meant to pay off via an increase in efficiency.

Genuinely multi-dimensional schemes are most efficient in modeling essentially multi-dimensional phenomena in a relatively small region, such as push-pull flow or flow around a sharp corner. If such regions have a strong influence on the overall solution, then the use of a multi-dimensional scheme is recommendable.

In the further sections of this paper I shall indicate how to construct second-order difference schemes in two or three space dimensions. First-order schemes were published earlier [3]; their construction is briefly reviewed.

## 2. A FIRST-ORDER SCHEME

In order to derive a first-order scheme for Eq.(3), consider the scalar linear equation

$$u_t + au_x + bu_y + cu_z = 0, \quad a > 0, \quad b > 0, \quad c > 0, \quad (5)$$

in combination with a piecewise uniform initial-value distribution

$$u^n(x, y, z) = u_{ijk}^n, \quad x_{i-\frac{1}{2}} < x < x_{i+\frac{1}{2}}, \quad y_{j-\frac{1}{2}} < y < y_{j+\frac{1}{2}}, \quad z_{k-\frac{1}{2}} < z < z_{k+\frac{1}{2}}, \quad (6)$$

with  $x_{i\pm\frac{1}{2}} = x_i \pm \frac{1}{2}\Delta x$ ,  $y_{j\pm\frac{1}{2}} = y_j \pm \frac{1}{2}\Delta y$ ,  $z_{k\pm\frac{1}{2}} = z_k \pm \frac{1}{2}\Delta z$ .

The exact solution of (5) at time  $t^{n+1}$  in terms of the initial values at  $t^n$  is

$$u^{n+1}(x, y, z) = u^n(x - a\Delta t, y - b\Delta t, z - c\Delta t). \quad (7)$$

Inserting the initial values (6) into (7) yields, for sufficiently small  $\Delta t$ , the following difference scheme:

$$\begin{aligned} u^{n+1} = & \left[ 1 - \sigma_x \Delta_x \left\{ 1 - \frac{1}{2} \sigma_y \Delta_y \left( 1 - \frac{1}{3} \sigma_z \Delta_z \right) - \frac{1}{2} \sigma_z \Delta_z \left( 1 - \frac{1}{3} \sigma_y \Delta_y \right) \right\} \right. \\ & \left. - \sigma_y \Delta_y \left\{ 1 - \frac{1}{2} \sigma_z \Delta_z \left( 1 - \frac{1}{3} \sigma_x \Delta_x \right) - \frac{1}{2} \sigma_x \Delta_x \left( 1 - \frac{1}{3} \sigma_z \Delta_z \right) \right\} \right] \end{aligned}$$

$$- \sigma_z \Delta_z \left\{ 1 - \frac{1}{2} \sigma_x \Delta_x \left( 1 - \frac{1}{3} \sigma_y \Delta_y \right) - \frac{1}{2} \sigma_y \Delta_y \left( 1 - \frac{1}{3} \sigma_x \Delta_x \right) \right\} u^n,$$

$$\sigma_x = a\Delta t/\Delta x < 1, \quad \sigma_y = b\Delta t/\Delta y < 1, \quad \sigma_z = c\Delta t/\Delta z < 1; \quad (8)$$

here  $\Delta_x$ ,  $\Delta_y$ ,  $\Delta_z$  denote backward (upwind) differencing in the x-, y-, z-direction.

The terms in the above formula have been especially arranged in order to facilitate their interpretation. The terms in parentheses are one-dimensional updates over a time-step  $1/3 \Delta t$ , with the first-order upwind scheme. The braced terms are two-dimensional updates over a time-step  $1/2 \Delta t$ , and represent the values of  $u$  at cell interfaces, averaged both in space and in time. The full operator, between brackets, shows the three-dimensional upwind nature of the scheme.

Godunov [4] has indicated how to transform upwind differencing for a scalar linear convection equation into a method for a nonlinear hyperbolic system of the form (2). For scheme (8) his recipe implies replacement of  $\sigma_x \Delta_x u$  by

$$\frac{\Delta t}{\Delta x} [(\Delta_x f)^+ + (\nabla_x f)^-] \quad (9.1)$$

or

$$\frac{\Delta t}{\Delta x} [\Delta_x (f^+) + \nabla_x (f^-)] , \quad (9.2)$$

where  $\nabla$  denotes forward differencing and the superscripts  $+$  and  $-$  indicate the splitting of a flux-difference or a flux in parts associated with forward and backward signals, respectively (see [5] and [6]). The expressions  $\sigma_y \Delta_y u$  and  $\sigma_x \Delta_x u$  are replaced analogously.

Note that (8) can be factorized exactly as indicated in (4):

$$u_{ijk}^{n+1} = (1 - \sigma_z \Delta_z)(1 - \sigma_y \Delta_y)(1 - \sigma_x \Delta_x) u_{ijk}^n . \quad (10)$$

While this property in general is lost when extending the scheme to a linear or nonlinear hyperbolic system, it nevertheless shows that dimensional splitting basically is a sound idea.

### 3. SECOND-ORDER SCHEMES

Second-order schemes for Eq. (3) may be derived, again, by extending schemes for Eq. (5). In order to achieve second-order accuracy in time and space we must use a piecewise linear initial-value distribution (see [7]), i.e.,

$$u^n(x, y, z) = u_{ijk}^n + \frac{x-x_i}{\Delta x} \delta_{x,ijk}^n + \frac{y-y_i}{\Delta y} \delta_{y,ijk}^n + \frac{z-z_k}{\Delta z} \delta_{z,ijk}^n,$$

$$x_{i-\frac{1}{2}} < x < x_{i+\frac{1}{2}}, \quad y_{j-\frac{1}{2}} < y < y_{j+\frac{1}{2}}, \quad z_{k-\frac{1}{2}} < z < z_{k+\frac{1}{2}}; \quad (11)$$

here  $\delta_x u$ ,  $\delta_y u$  and  $\delta_z u$  represent locally averaged differences of  $u$ , e.g.  
 $\delta_x = \frac{1}{2}(\Delta_x + \nabla_x)$ .

Combining (11) with the exact solution (7) of (5) reveals that the second-order scheme contains terms up to  $O[(\Delta t)^2]$  when restricted to one dimension, up to  $O[(\Delta t)^3]$  in two dimensions, and up to  $O[(\Delta t)^4]$  in three dimensions. The two- and three-dimensional schemes therefore can not be equivalent to products of steps with the one-dimensional scheme.

For simplicity, consider first the two-dimensional scheme; with the terms arranged as in (8) it reads

$$\begin{aligned} u_{ijk}^{n+1} = & \left[ 1 - \sigma_x \Delta_x \left\{ 1 + \frac{1}{2}(1 - \sigma_x) \delta_x - \frac{1}{2} \sigma_y \Delta_y \left[ 1 + \left( \frac{1}{2} - \frac{2}{3} \sigma_x \right) \delta_x + \left( \frac{1}{2} - \frac{1}{3} \sigma_y \right) \delta_y \right] \right\} \right. \\ & \left. - \sigma_y \Delta_y \left\{ 1 + \frac{1}{2}(1 - \sigma_y) \delta_y - \frac{1}{2} \sigma_x \Delta_x \left[ 1 + \left( \frac{1}{2} - \frac{2}{3} \sigma_y \right) \delta_y + \left( \frac{1}{2} - \frac{1}{3} \sigma_x \right) \delta_x \right] \right\} \right] u_{ijk}^n, \\ & \sigma_x < 1, \quad \sigma_y < 1, \quad \sigma_z < 1. \end{aligned} \quad (12)$$

When changing this scalar scheme into a scheme for a nonlinear system, we must replace  $\sigma_x \delta_x u_{ijk}^n$  by

$$\frac{\Delta t}{\Delta x} \left\{ f[(1 + \frac{1}{2} \delta_x) u_{ijk}^n] - f[(1 - \frac{1}{2} \delta_x) u_{ijk}^n] \right\}, \quad (13)$$

a central difference of fluxes inside of volume  $(ijk)$ . The resulting method is unattractive because of the many intermediate steps needed for a full update; moreover, it is not clear that all steps are relevant for a non-diagonalizable hyperbolic system.

A slight simplification results when the third-order terms on the right-hand side of (12) are taken together, yielding

$$\sigma_x \sigma_y \Delta_x \Delta_y \left[ \frac{1}{2}(1 - \sigma_x) \delta_x + \frac{1}{2}(1 - \sigma_y) \delta_y \right], \quad (14)$$

and then redistributed in a more convenient fashion over the expressions in braces, e.g. with weight  $\frac{1}{2}$  in each expression. The most drastic simplification results by omitting all third-order terms. This does not appear to affect the stability condition of the scheme. Its short-wave stability is still dictated by the first-order scheme (8), while its long-wave stability is slightly improved (dropping (14) causes the long waves to slow down).

The three-dimensional scalar linear version of this simplest scheme is



$$\begin{aligned}
 u_{ijk}^{n+1} = & \left\{ 1 - \sigma_x \Delta_x \left\{ 1 + \frac{1}{2}(1 - \sigma_x) \delta_x - \frac{1}{2} \sigma_y \Delta_y \left( 1 - \frac{1}{3} \sigma_z \Delta_z \right) - \frac{1}{2} \sigma_z \Delta_z \left( 1 - \frac{1}{3} \sigma_y \Delta_y \right) \right\} \right. \\
 & - \sigma_y \Delta_y \left\{ 1 + \frac{1}{2}(1 - \sigma_y) \delta_y - \frac{1}{2} \sigma_z \Delta_z \left( 1 - \frac{1}{3} \sigma_x \Delta_x \right) - \frac{1}{2} \sigma_x \Delta_x \left( 1 - \frac{1}{3} \sigma_z \Delta_z \right) \right\} \\
 & \left. - \sigma_z \Delta_z \left\{ 1 + \frac{1}{2}(1 - \sigma_z) \delta_z - \frac{1}{2} \sigma_x \Delta_x \left( 1 - \frac{1}{3} \sigma_y \Delta_y \right) - \frac{1}{2} \sigma_y \Delta_y \left( 1 - \frac{1}{3} \sigma_x \Delta_x \right) \right\} \right\} u_{ijk}^n, \\
 & \sigma_x < 1, \quad \sigma_y < 1, \quad \sigma_z < 1.
 \end{aligned} \tag{15}$$

It turns out that a two-dimensional version of this scheme for the Euler equations was derived independently by P. Collella (private communication, 1983) and has already been applied successfully to an aerodynamics flow problem in a curvilinear grid [8].

#### 4. CONCLUSIONS

In the preceding sections it has been shown that fully three-dimensional difference schemes for hyperbolic systems of conservation laws can be constructed on the basis of a simple convection principle.

The resulting schemes are explicit, upwind biased and stable under a combination of one-dimensional Courant-Friedrichs-Lewy conditions. The latter property they share with dimensionally factorized schemes.

A two-dimensional second-order scheme of this kind has been put into practice by Eidelman, Colella and Shreeve [8]. A numerical comparison between factorized and non-factorized schemes remains to be made.

#### References

1. A.R. Gourlay and J.Ll. Morris, J. Comp. Phys. 5 (1970), 229.
2. P.R. Woodward and P. Colella, "The numerical simulation of two-dimensional fluid flow with strong shocks", Lawrence Livermore Lab. Report UCRL 86952 (1982), to appear in J. Comp. Phys.
3. B. van Leer, "Computational methods for ideal compressible flow". NASA Contractor Report 172180, July 1983.
4. S.K. Godunov, Matem. Sb. 47 (1959), 271.
5. P.L. Roe, "Fluctuations and signals, a framework for numerical evolution problems", in Numerical Methods for Fluid Dynamics, eds. K.W. Morton and M.J. Baines, Academic Press, New York, 1982.
6. A. Harten, P.D. Lax and B. van Leer, SIAM Review 25 (1983), 35.
7. B. van Leer, J. Comp. Phys. 23 (1977), 276.
8. S. Eidelman, P. Colella and R.P.S. Shreeve, "Application of the Godunov method and higher order extensions of the Godunov method to cascade flow modeling", AIAA paper 83-1941-CP, AIAA 6th Computational FLuid Dynamics Conference, July 1983, Danvers, MA.

1. Report No. NASA CR-172254		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle  Multidimensional Explicit Difference Schemes for Hyperbolic Conservation Laws				5. Report Date November 1983	
				6. Performing Organization Code	
7. Author(s)  Bram van Leer				8. Performing Organization Report No. 83-61	
9. Performing Organization Name and Address Institute for Computer Applications in Science and Engineering Mail Stop 132C, NASA Langley Research Center Hampton, VA 23665				10. Work Unit No.	
				11. Contract or Grant No. NAS1-15810	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546				13. Type of Report and Period Covered contractor report	
				14. Sponsoring Agency Code	
15. Supplementary Notes  Langley Technical Monitor: Robert H. Tolson Final Report					
16. Abstract  First- and second-order explicit difference schemes are derived for a three-dimensional hyperbolic system of conservation laws, without recourse to dimensional factorization. All schemes are upwind biased and optimally stable.					
17. Key Words (Suggested by Author(s))  hyperbolic equations explicit methods stability			18. Distribution Statement  64 Numerical Analysis  Unclassified-Unlimited		
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified		21. No. of Pages 7	22. Price A02	



NASA Technical Library



3 1176 01416 8273

---